Dresden University of Technology

Computational Logic ∴ Group

Hannes Strass (based on slides by Michael Thielscher)

Faculty of Computer Science, Institute of Artificial Intelligence, Computational Logic Group

Least Herbrand Models

Lecture 5, 9th Nov 2026 // Foundations of Logic Programming, WS 2026/27

Previously . . .

- The semantics of (definite) logic programs is given by a standard first-order model theory, with logical entailment $\models$ defined as usual.
- SLD resolution is **sound**: For every successful SLD derivation of $P \cup \{Q_0\}$ with *computed* answer substitution θ, we have $P \models Q_0\theta$.
- SLD resolution is **complete**: If θ is a *correct* answer substitution of Q, then
  - for every selection rule
  - there exists a successful SLD derivation of $P \cup \{Q\}$ with cas η
  - such that η is at least as general as θ.

$$P \vdash_{SLD} Q_0\eta \quad \Longleftrightarrow \quad P \models Q_0\theta$$

η more general than θ

proof theory — model theory

Ground Implication Trees Constitute Herbrand Models

Lemma 4.26

Consider Herbrand interpretation I, atom A, program P.

- $I \Vdash A$ iff $ground(A) \subseteq I$
- $I \Vdash P$ iff for every $A \leftarrow B_1, \ldots, B_n \in ground(P)$,

$$\{B_1, \ldots, B_n\} \subseteq I \text{ implies } A \in I$$

Lemma 4.28

The Herbrand interpretation

$$\mathcal{M}(P) := \{ A \mid A \text{ is the root of some ground implication tree w.r.t. } P \}$$

is a model of P.

Overview

Least Herbrand Models

Computing Least Herbrand Models

History

Turing-Completeness

Least Herbrand Models

Least Herbrand Model (1)

Theorem (Model Intersection Property)

Let P be a definite logic program and $\mathcal{K}$ be a non-empty set of Herbrand models of P. Then $\bigcap \mathcal{K} := \bigcap_{K \in \mathcal{K}} K$ is again a Herbrand model of P.

Proof.

- Employing Lemma 4.26, assume that $A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P)$.
- If $\{B_1, \ldots, B_n\} \subseteq \bigcap \mathcal{K}$, then for each $K \in \mathcal{K}$ we have $\{B_1, \ldots, B_n\} \subseteq K$.
- Thus for each $K \in \mathcal{K}$, since K is a Herbrand model of P, we get $A \in K$.
- Hence $A \in K$ for each $K \in \mathcal{K}$, thus $A \in \bigcap \mathcal{K}$. □

Note: This property does not hold for (sets of) general (non-Horn) clauses.

Corollary

The set $\bigcap \{ I \mid I \text{ is a Herbrand model of P} \}$ is the least Herbrand model of P.

Least Herbrand Model (2)

Theorem 4.29

$\mathcal{M}(P)$ is the least Herbrand model of P.

Proof.

Let I be a Herbrand model of P and let $A \in \mathcal{M}(P)$.
We prove $A \in I$ by induction on the maximal number i of nodes in the ground implication tree w.r.t. P with root A. It then follows that $\mathcal{M}(P) \subseteq I$.

$i = 1$:	A is a leaf	implies	$A \leftarrow \in \mathit{ground}(P)$
		implies	$I \Vdash A$ (since $I \Vdash P$)
		implies	$A \in I$
$i \rightsquigarrow i+1$:	A has direct descendants $B_1, \ldots, B_n$ (roots of subtrees)		
implies	$A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P)$ and by IH we get $B_1, \ldots, B_n \in I$		
implies	$A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P)$ and $I \Vdash B_1, \ldots, B_n$		
implies	$I \Vdash A$ (since $I \Vdash P$)		
implies	$A \in I$		

□

Ground Equivalence

Theorem 4.30

For every ground atom A: $P \models A$ if and only if $\mathcal{M}(P) \Vdash A$.

Proof.

"$\Rightarrow$": $P \models A$ and $\mathcal{M}(P) \Vdash P$ implies $\mathcal{M}(P) \Vdash A$ (semantic consequence).

"$\Leftarrow$": Let $A \in \mathcal{M}(P)$. Show for every interpretation I: $I \Vdash P$ implies $I \Vdash A$.

Define $I_H = \{A \mid A \text{ ground atom and } I \Vdash A\}$ the Herbrand interpretation of I.

	$I \Vdash P$
implies	$I \Vdash A \leftarrow B_1, \ldots, B_n$ for all $c = A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P)$
implies	if $I \Vdash B_1, \ldots, I \Vdash B_n$ then $I \Vdash A$ for all $c \in \mathit{ground}(P)$
implies	if $B_1 \in I_H, \ldots, B_n \in I_H$ then $A \in I_H$ for all $c \in \mathit{ground}(P)$ (Def. I_H)
implies	$I_H \Vdash P$ (by Lemma 4.26; thus I_H is a Herbrand model of P)
implies	$A \in I_H$ (since $A \in \mathcal{M}(P)$ and $\mathcal{M}(P)$ least Herbrand model of P)
implies	$I \Vdash A$ (by Def. I_H)

□

Computing Least Herbrand Models

Complete Partial Orders

Definition

Let $(\mathcal{A}, \sqsubseteq)$ be a partially ordered set, i.e. $\sqsubseteq \subseteq \mathcal{A} \times \mathcal{A}$. (cf. Lecture 2)

- $a \in \mathcal{A}$ is the **least** element of $X \subseteq \mathcal{A}$ $:\Longleftrightarrow$ $a \in X$ and $a \sqsubseteq x$ for all $x \in X$
- $b \in \mathcal{A}$ is an **upper bound** of $X \subseteq \mathcal{A}$ $:\Longleftrightarrow$ $x \sqsubseteq b$ for all $x \in X$
- $a \in \mathcal{A}$ is the **least upper bound** of $X \subseteq \mathcal{A}$ (Notation: $a = \bigsqcup X$)
  $:\Longleftrightarrow$ a is the least element of $\{b \in \mathcal{A} \mid b \text{ is an upper bound of } X\}$

Definition

The pair $(\mathcal{A}, \sqsubseteq)$ is a **complete** partial order (**cpo**) $:\Longleftrightarrow$

- $\mathcal{A}$ contains a least element (denoted by $\emptyset$),
- for every ascending chain $a_0 \sqsubseteq a_1 \sqsubseteq a_2 \ldots$ of elements of $\mathcal{A}$, the set $X = \{a_0, a_1, a_2, \ldots\}$ has a least upper bound.

Some Properties of Operators

Definition

Let $(\mathcal{A}, \sqsubseteq)$ be a CPO and $T \colon \mathcal{A} \to \mathcal{A}$ be an operator.

- T is **order-preserving** (or **monotonic**)
  $:\iff$ for all $I_1, I_2 \in \mathcal{A}$: $I_1 \sqsubseteq I_2$ implies $T(I_1) \sqsubseteq T(I_2)$
- T is **finitary** $:\iff$ for every infinite ascending chain $I_0 \sqsubseteq I_1 \sqsubseteq \ldots$,

$$\bigsqcup \{T(I_0), T(I_1), \ldots\} \text{ exists} \quad \text{and} \quad T\left(\bigsqcup \{I_0, I_1, \ldots\}\right) \sqsubseteq \bigsqcup \{T(I_0), T(I_1), \ldots\}$$

- T is **continuous** $:\iff$ T is order-preserving and finitary.

Intuitively, a continuous operator preserves least upper bounds:

$$T\left(\bigsqcup \{I_0, I_1, \ldots\}\right) = \bigsqcup \{T(I_0), T(I_1), \ldots\}$$

The other inclusion follows from T being order-preserving: Since $I_0 \sqsubseteq I_1 \sqsubseteq \ldots$ is a chain and T is order-preserving, $T(I_0) \sqsubseteq T(I_1) \sqsubseteq \ldots$ is again a chain and $\bigsqcup \{T(I_0), T(I_1), \ldots\}$ exists. Since $I_i \sqsubseteq \bigsqcup \{I_0, I_1, \ldots\}$ for any $i \in \mathbb{N}$ and T is order-preserving, $T(I_i) \sqsubseteq T(\bigsqcup \{I_0, I_1, \ldots\})$. Thus $T(\bigsqcup \{I_0, I_1, \ldots\})$ is an upper bound of $\{T(I_0), T(I_1), \ldots\}$ and $\bigsqcup \{T(I_0), T(I_1), \ldots\} \sqsubseteq T(\bigsqcup \{I_0, I_1, \ldots\})$.

Iterating Operators

Definition

Let $(\mathcal{A}, \sqsubseteq)$ be a CPO, $T\colon \mathcal{A} \to \mathcal{A}$, and $I \in \mathcal{A}$.

$$
\begin{aligned}
T{\uparrow}0\,(I) &:= I \\
T{\uparrow}(n+1)\,(I) &:= T(T{\uparrow}n(I)) \\
T{\uparrow}\omega\,(I) &:= \bigsqcup \{T{\uparrow}n(I) \mid n \in \mathbf{N}\}
\end{aligned}
$$

Similarly, define

$$T{\uparrow}\alpha := T{\uparrow}\alpha\,(\emptyset) \qquad \text{for } \alpha = 0, 1, 2, \ldots, \omega$$

By the definition of a complete partial order:
If the sequence $T{\uparrow}0\,(I), T{\uparrow}1\,(I), T{\uparrow}2\,(I), \ldots$ is increasing, then $T{\uparrow}\omega\,(I)$ exists.

Fixpoints and Pre-Fixpoints

Definition

Let $T\colon \mathcal{A} \to \mathcal{A}$ be an operator and $I \in \mathcal{A}$.

- I is a **pre-fixpoint** of $T \;:\Longleftrightarrow\; T(I) \sqsubseteq I$
- I is a **fixpoint** of $T \;:\Longleftrightarrow\; T(I) = I$

Theorem 4.22 (Kleene's fixpoint theorem)

If T is a continuous operator on a CPO $(\mathcal{A}, \sqsubseteq)$, then $T{\uparrow}\omega$ exists and is the least fixpoint of T.

Proof (1/2).

- $T{\uparrow}0 = \emptyset \sqsubseteq T(\emptyset) = T{\uparrow}1$ since $\emptyset$ is the least element of $(\mathcal{A}, \sqsubseteq)$.
- $T(\emptyset) \sqsubseteq T(T(\emptyset))$ because T is order-preserving.
- Thus $T{\uparrow}i \sqsubseteq T{\uparrow}(i+1)$ for all $i \in \mathbb{N}$ by induction.

Proof of Theorem 4.22

Proof (2/2).

- Therefore $C = \{T{\uparrow}0, T{\uparrow}1, T{\uparrow}2, \ldots\}$ is a chain and $T{\uparrow}\omega = \bigsqcup C$ exists.
- Since T is continuous $(*)$, $T{\uparrow}\omega$ is a fixpoint of T:

$$\begin{aligned} T(T{\uparrow}\omega) = T\left(\bigsqcup C\right) &= T\left(\bigsqcup \{T{\uparrow}0, T{\uparrow}1, T{\uparrow}2, \ldots\}\right) \\ &\overset{*}{=} \bigsqcup \{T{\uparrow}1, T{\uparrow}2, T{\uparrow}3, \ldots\} \\ &= \bigsqcup \{\emptyset, T{\uparrow}1, T{\uparrow}2, T{\uparrow}3, \ldots\} = \bigsqcup C = T{\uparrow}\omega \end{aligned}$$

- Now let $E = T(E)$ be any fixpoint of T.
- We have $\emptyset \sqsubseteq E$ and thus $T(\emptyset) \sqsubseteq T(E) = E$.
- Again by induction, $T{\uparrow}i \sqsubseteq E$ for all $i \in \mathbb{N}$.
- Thus E is an upper bound for C and $T{\uparrow}\omega \sqsubseteq E$. □

Least Fixpoints and Pre-Fixpoints

Proposition 4.23

Let $(\mathcal{A}, \sqsubseteq)$ be a partially ordered set and $T\colon \mathcal{A} \to \mathcal{A}$ be an order-preserving operator.
If T has a least pre-fixpoint π, then π is also the least fixpoint of T.

Proof.

- Assume that π is the least pre-fixpoint of T.
- In particular, $T(\pi) \sqsubseteq \pi$. Since T is order-preserving, $T(T(\pi)) \sqsubseteq T(\pi)$.
- Thus $T(\pi)$ is a pre-fixpoint of T, whence $\pi \sqsubseteq T(\pi)$.
- Thus π is a fixpoint of T.
- Since every fixpoint of T is also a pre-fixpoint of T, the claim follows. □

One-Step Consequence Operator

Definition

Consider a logical vocabulary with predicate symbols Π and function symbols F, and the cpo $(\mathcal{I}, \subseteq)$ with $\mathcal{I} = \{I \subseteq HB_{\Pi,F}\}$ the set of all Herbrand interpretations.
Let P be a definite logic program over Π and F. Define the operator $T_P \colon \mathcal{I} \to \mathcal{I}$ via:

$$T_P(I) := \{ A \mid A \leftarrow B_1, \ldots, B_n \in ground(P), \{B_1, \ldots, B_n\} \subseteq I \}$$

Lemma 4.33

Let P be a definite logic program.

(i) T_P is order-preserving.

(ii) T_P is finitary.

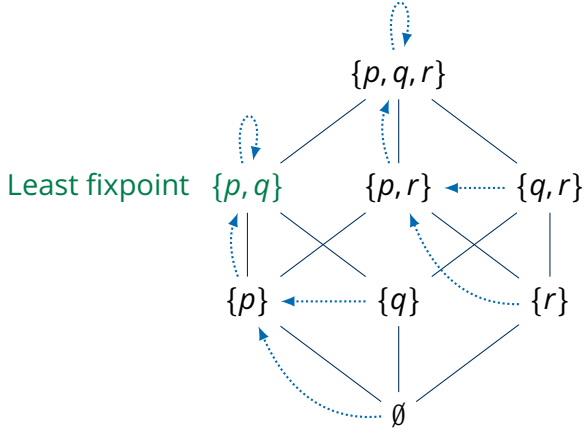
Proof: Exercise.

Thus T_P is continuous and its least fixpoint is given by $T_P{\uparrow}\omega = T_P{\uparrow}\omega(\emptyset)$.

T_P-Operator: Example (1)

Consider the (propositional) program $P = \{p \leftarrow, \quad q \leftarrow p, \quad r \leftarrow r\}$.

The operator T_P maps as follows: $I \dashrightarrow T_P(I)$



Quiz: T_P-Operator

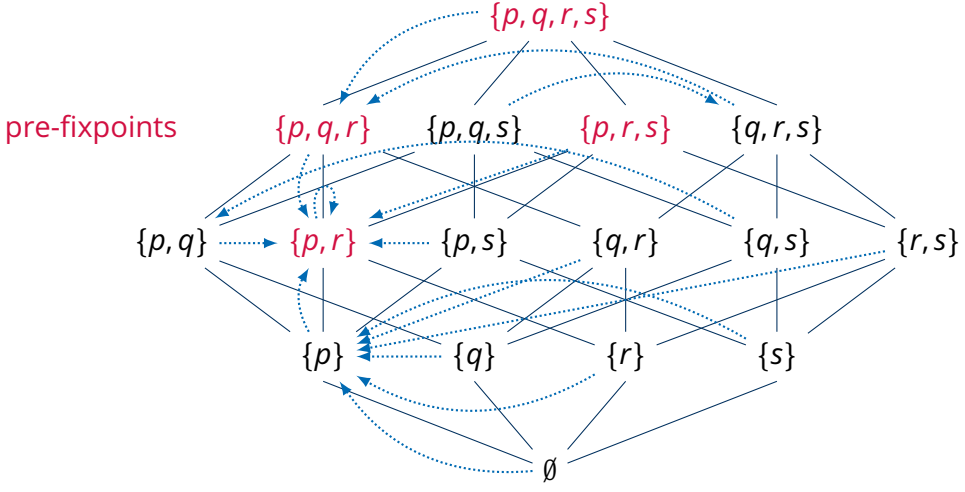
Recall: $T_P(I) := \{ A \mid A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P), \{B_1, \ldots, B_n\} \subseteq I \}$.

Quiz

Consider the following (definite) logic program: ...

T_P-Operator: Example (2)

Consider the logic program $P = \{p \leftarrow, \quad q \leftarrow q, s, \quad r \leftarrow p\}$.



T_P-Characterisation

Lemma 4.32

A Herbrand interpretation I is a model of P iff

$$T_P(I) \subseteq I$$

Proof.

$I \Vdash P$
iff for every $A \leftarrow B_1, \ldots, B_n \in \mathit{ground}(P)$:
$\{B_1, \ldots, B_n\} \subseteq I$ implies $A \in I$ (by Lemma 4.26)
iff for every ground atom A: $A \in T_P(I)$ implies $A \in I$
iff $T_P(I) \subseteq I$ □

Characterisation Theorem

Theorem 4.34

	$\{A \mid A \text{ ground atom}, P \models A\}$	
=	$\mathcal{M}(P)$	(Theorem 4.30)
=	least Herbrand model of P	(Theorem 4.29)
=	least pre-fixpoint of T_P	(Lemma 4.32)
=	least fixpoint of T_P	(Proposition 4.23)
=	$T_P{\uparrow}\omega$	(Theorem 4.22)

Success Sets

Definition

The **success set** of a program P is the set of all ground atoms A for which there exists a successful SLD derivation of $P \cup \{A\}$.

Theorem 4.37

For a ground atom A, the following are equivalent:

(i) $\mathcal{M}(P) \Vdash A$

(ii) $P \models A$

(iii) Every SLD tree for $P \cup \{A\}$ is successful

(iv) A is in the success set of P

History

Timeline

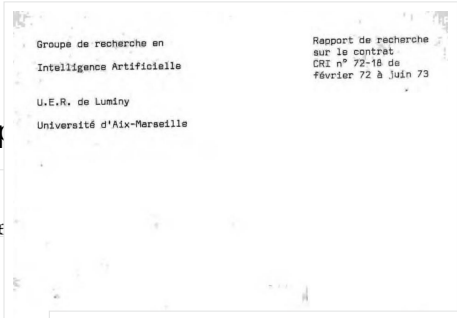
1965: John Alan Robinson: The resolution p

197

197


197

197


Groupe de recherche en
Intelligence Artificielle

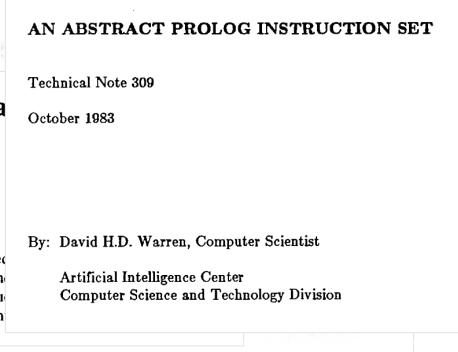
U.E.R. de Luminy
Université d'Aix-Marseille

Rapport de recherche
sur le contrat
CRI n° 72-18 de
février 72 à juin 73


A Machine-Oriented Logic Based on the

ARTIFICIAL INTELLIGENCE

Linear Resolution with Select

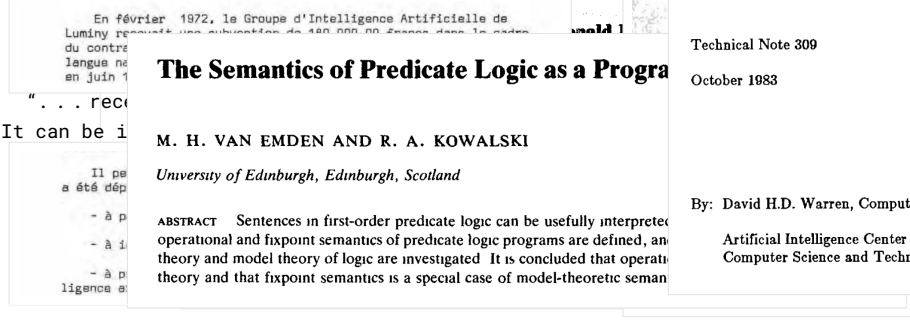

AN ABSTRACT PROLOG INSTRUCTION SET

Technical Note 309

October 1983

By: David H.D. Warren, Computer Scientist

Artificial Intelligence Center
Computer Science and Technology Division


En février 1972, le Groupe d'Intelligence Artificielle de
Luminy
du contra
langue na
en juin 1

". . . rec

"It can be i

Il pe
a été dép

- à p
- à i
- à p
ligence a

The Semantics of Predicate Logic as a Progra

M. H. VAN EMDEN AND R. A. KOWALSKI

University of Edinburgh, Edinburgh, Scotland

ABSTRACT Sentences in first-order predicate logic can be usefully interprete
operational and fixpoint semantics of predicate logic programs are defined, an
theory and model theory of logic are investigated. It is concluded that operati
theory and that fixpoint semantics is a special case of model-theoretic seman

Alain Colmerauer (1941–2017)


- French computer scientist
- Natural language processing, PROLOG, constraint logic programming
- Knight of the French Legion of Honour (1986), AAAI Fellow (1991)



(C) CC BY-SA 4.0 Alain David

Robert Anthony Kowalski (b. 1941)

- American-British logician and computer scientist
- Logic programming, event calculus, abductive logic programming
- Doctoral advisor of David Warren, Keith Clark
- AAAI Fellow (1991), IJCAI Award for Research Excellence (2011)



(C) CC BY 3.0 Yongyuth Permpoontanalarp

Selection Function vs. Selection Rule

Recall

A program clause $A \leftarrow B_1, \ldots, B_n$ is a (definite) FOL clause $A \vee \neg B_1 \vee \ldots \vee \neg B_n$.

Definition

A **selection function** assigns to each non-empty clause C a literal $L \in C$.

Observation

- For a fact (unit clause) A, any selection function must select A.
- For a negated query $\neg(B_1, \ldots, B_n)$ (i.e. a clause $\neg B_1 \vee \ldots \vee \neg B_n$), any selection function must select a negative literal.
- For a program clause, a positive or a negative literal can be selected.

- Selecting a negative literal: Forward chaining (e.g. Datalog)
- Selecting the positive literal: Backward chaining (SLD resolution)

A **selection rule** restricts the selection function to (negated) queries.

FOL Resolution vs. SLD Resolution

Recall

For program P and query $B_1, \ldots, B_n$, we want to show $P \models B_1, \ldots, B_n$.

Observation

In first-order logic, $P \models B_1 \wedge \ldots \wedge B_n$ iff $P \cup \{\neg(B_1 \wedge \ldots \wedge B_n)\}$ is unsatisfiable.

- We use FOL resolution to show that $P \cup \{\neg B_1 \vee \ldots \vee \neg B_n\}$ is unsatisfiable.
- A backward-chaining selection function will always select positive literals from program clauses.
- So the only negative literals to resolve on can come from the (negated) query.
- Thus the ensuing resolution is linear in the sense that a (negated) query is involved in every step.

Turing-Completeness

Definite Clauses as Programming Language?

First-order clauses in combination with SLD resolution constitute a Turing-complete computation mechanism.

Turing machine $M = (Q, \Sigma, \Gamma, \delta, q_0, F)$ can be cast as a logic program P_M:

- states $q \in Q$ represented by constants
- input/tape alphabet symbols $a \in \Gamma$ represented by unary functions
- words $w = a_1 a_2 \cdots a_n \in \Gamma^*$ represented as terms $t_w = a_1(a_2(\cdots a_n(e)\cdots))$
- thus the empty word ε is represented by the constant e
- tape content to the left of the head is in reverse: $t_w^R = a_n(a_{n-1}(\cdots a_1(e)\cdots))$
- configuration vqw of the TM represented by query $conf(t_v^R, q, t_w)$

Definite Clauses as Programming Language!

First-order clauses in combination with SLD resolution constitute a Turing-complete computation mechanism.

- transition function $\delta\colon Q \times \Gamma \to 2^{Q \times \Gamma \times \{l,n,r\}}$ expressed by clauses like

$$conf(V, q, a(W)) \leftarrow conf(b(V), s, W) \qquad \text{for each } (s, b, r) \in \delta(q, a)$$
$$conf(V, q, e) \leftarrow conf(b(V), s, e) \qquad \text{for each } (s, b, r) \in \delta(q, \square)$$

- acceptance is ensured via facts

$$conf(V, q, a(W)) \leftarrow \qquad \text{for each } q \in F, a \in \Gamma \text{ with } \delta(q, a) = \emptyset$$
$$conf(V, q, e) \leftarrow \qquad \text{for each } q \in F \text{ with } \delta(q, \square) = \emptyset$$

Theorem

TM M accepts w iff $P_M \cup \{conf(e, q_0, t_w)\}$ has a successful SLD derivation.

Conclusion

Summary

- Definite Horn clauses possess the **model intersection property**.
- Thus each definite logic program has a **unique least Herbrand model**.
- The least fixpoint of a program's **one-step consequence operator** T_P coincides with its least Herbrand model.
- First-order clauses in combination with SLD resolution constitute a **Turing-complete** computation mechanism.

Suggested action points:

- Find a (non-Horn) clause C with two Herbrand models I_1, I_2 where $I_1 \cap I_2 \not\models C$. (See slide 6.)
- Show that T_P is order-preserving and finitary, thus continuous.